D-175A

API Single Cartridge Seal

DAIKOTE
INNOV8TIVE SOLUTIONS

Materials

Stationary: - Car / SiC / SSiC / TC
Rotary: - SiC / SSiC / TC
Elastomer: - NBR / EPDM / Viton / Aflas / FFKM

Working Conditions

Pressure: ≤ 40 bar
Speed: ≤ 25 m/s
Temperature up to 205°C

Features

Stationary design
Monolithic faces
Cushioned faces
Pressure balanced
Springs outside of media
Floating quench
Optional hydro pads

D-175A Gland

Details to be confirmed by customer:
Gland OD
Stuffing Box Bore
Hole size (Stud size)
Hole/Stud PCD
Number of Bolts/Studs

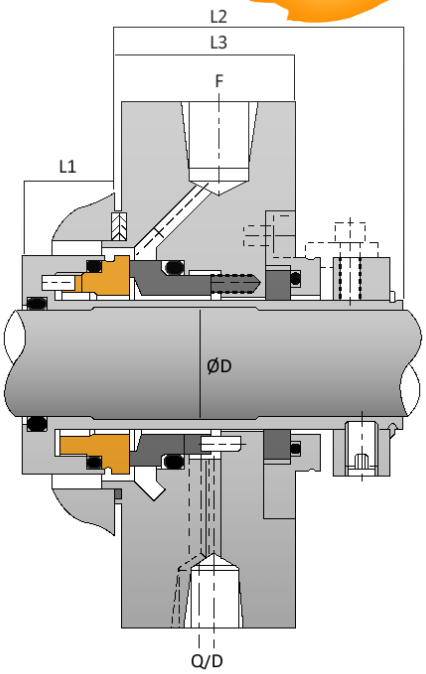



Optional Hydro Pads

Inch ØD	Code
1.000	0254
1.125	0286
1.250	0317
1.375	0349
1.500	0381
1.625	0412
1.750	0444
1.875	0476
2.000	0508
2.125	0539
2.250	0572
2.375	0603
2.500	0635
2.625	0666
2.750	0698
2.875	0730
3.000	0762
3.125	0794
3.250	0825
3.375	0857
3.500	0889
3.625	0921
3.750	0953
3.875	0984
4.000	1016
4.125	1048
4.250	1080
4.375	1111
4.500	1143
4.625	1175
4.750	1207
4.875	1238
5.000	1270

L1		L2		L3	
mm	*inch*	*mm*	*inch*	*mm*	*inch*
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437
60	1.299	60	2.362	36.5	1.437