

D-80 / D-SW01


DAIKOTE
INNOV8TIVE SOLUTIONS

Materials

Stationary: - Car / SiC / SSiC / TC
Rotary:
Insert Face: SiC / SSiC / TC
Solid Face: Stainless Steel
Elastomer: - NBR / EPDM / Viton / FFKM

Working Conditions

Pressure: ≤ 12 bar
Speed: ≤ 20 m/s
Temperature: Up to 205°C

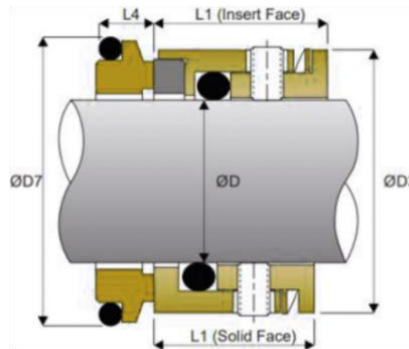

Shaft ØD	Code	ØD3	L1		D-SW01	
			Solid Face	Insert Face	L4	ØD7
15.8	0159	27	19.1	19.6	6.3	28.5
16	0160	27	19.1	19.6	6.3	28.5
19.1	0191	30	19.1	20.1	6.3	31.7
24	0240	34.1	19.1	20.1	7.6	35.4
28	0280	40	19.1	20.1	7.6	42
28.6	0286	39.5	19.1	20.1	7.6	41.2
30	0300	41	19.1	20.1	7.6	42.7
31.7	0317	42.4	19.1	20.1	7.6	44.2
32	0320	42.4	19.1	20.1	7.6	44.4
35	0350	45.5	19.1	20.1	7.6	47.6
38	0380	51.8	21.1	21.5	7.6	53.9
44.4	0444	58.2	21.1	21.5	8.1	60.3
47.6	0476	61.4	21.1	21.5	8.1	63.5
50	0500	61.9	21.1	21.5	8.1	63.9
50.8	0508	64.6	22.1	22.5	9.6	66.6
53.9	0539	71	22.1	23.2	9.6	73
54	0540	71	22.1	23.2	9.6	73.9
55	0550	72	22.1	23.2	9.6	75
63	0630	79.3	25.8	27.4	9.1	83
63.5	0635	79.3	25.8	27.4	9.1	88.9
69.8	0698	88.9	25.8	27.4	9.1	95.2
73	0730	94	25.8	27.4	9.1	98.4
75	0750	96	25.8	27.4	9.1	100.4
76.2	0762	96	25.8	27.4	9.1	100.4

D-SW011

SSW011 – Inoxpa Prolac and SLR Pumps			

