

D-87 / D-SW03

DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary:


D-SW03: - Car / SiC / TC
D-SW04: - Car / SiC / SSiC / TC

Rotary:

D-87: - SiC / SSiC / TC / SS
Elastomer: - NBR / EPDM / Viton / FFKM

Working Conditions

Pressure: ≤ 20 bar
Speed: ≤ 5.5 m/s
Temperature: Up to 205°C

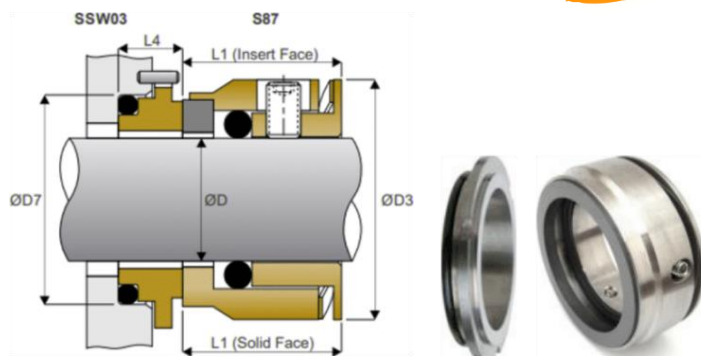

Code	Shaft ØD	L1 – D-87			D-SW03	
		L1 – Insert Face	L1 – Solid Face	ØD3	L4	ØD7
0200	20	20.5	20	32.4	10.5	30
0300	30	21.9	21.4	44	11.1	41.3
0350	35	22.5	22	50.8	12	47
0380	38	22.5	22	53.7	12	50.3
0450	45	23.4	22.9	62.4	12.6	58.3
0550	55	29.8	29.3	76	13.2	69.6
0600	60	30.4	29.9	82.8	13.6	75.2
0650	65	31	30.5	87.6	14	80.9
0750	75	31.6	31.1	99.2	14.4	92.2
0800	80	32.3	31.8	106	14.7	97.8
1000	100	34.1	33.6	127.2	15.9	120.4

D-SW04

D-SW04			
Code	Shaft ØD	ØD7	L4
0300	30	40	9.3
0350	35	44.5	9.2
0500	50	62	10.4
0700	70	85	14.1
0800	80	95	16.2

