


Materials

Stationary: - SiC / SiC / TC / SS
Rotary: - Car / SiC / SiC / TC
Elastomer: - NBR / EPDM / Viton / FFKM

Working Conditions

Pressure: ≤ 62 bar
Speed: ≤ 20 m/s
Temperature: Up to 205°C

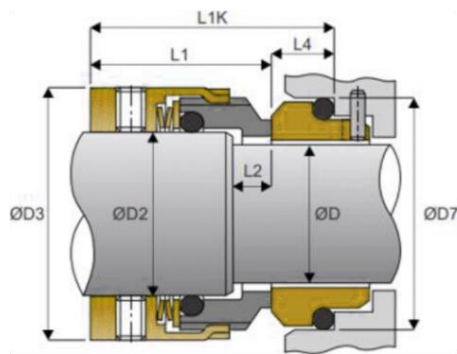

Metric			L1	L1K	L2	ØD3	D-S9 Stationary	
Code	Shaft ØD	Rotary ØD2					L4	ØD7
0140	14	18	32.5	42.5	8	33	10	25
0160	16	20	32.5	42.5	8	35	10	27
0180	18	22	33.5	45	8.5	37	11.5	33
0200	20	24	33.5	45	8.5	39	11.5	35
0220	22	26	33.5	45	8.5	41	11.5	37
0240	24	28	36	47.5	8.5	43	11.5	39
0250	25	30	36	47.5	8.5	45	11.5	40
0280	28	33	38.5	50	8.5	48	11.5	43
0300	30	35	38.5	50	8.5	50	11.5	45
0320	32	38	38.5	50	8.5	55	11.5	48
0350	35	40	38.5	50	8.5	57	11.5	50
0380	38	43	38.5	52.5	9	60	14	56
0400	40	45	38.5	52.5	9	62	14	58
0430	43	48	38.5	52.5	9	65	14	61
0450	45	50	38.5	52.5	9	67	14	63
0480	48	53	38.5	52.5	9	70	14	66
0500	50	55	42.5	57.5	10	72	15	70
0530	53	58	42.5	57.5	10	79	15	73
0550	55	60	42.5	57.5	10	81	15	75
0580	58	63	57.5	62.5	10	84	15	78
0600	60	65	57.5	62.5	10	86	15	80
0630	63	68	57.5	62.5	10	89	15	83
0650	65	70	57.5	62.5	10	91	15	85
0700	70	75	52	70	10	99	18	92
0750	75	80	52	70	10	104	18	97
0800	80	85	51.8	70	9.8	109	18.2	105
0850	85	90	56.8	75	9.8	114	18.2	110
0900	90	95	56.8	75	9.8	119	18.2	115
0950	95	100	57.8	75	10.8	124	17.2	120
1000	100	105	57.8	75	10.8	129	17.2	125
1050	105	115	53	73	12	148	20	134
1100	110	120	53	73	12	153	20	140.3
1150	115	125	53	73	12	158	20	148.3
1200	120	130	53	73	12	163	20	150.3