

D-HJ92 / D-S16

DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary:

D-S16: - SiC / SSiC / TC

Rotary: - Carbon


Elastomer: - NBR / EPDM / Viton / FFKM

Working Conditions

Pressure: ≤ 25 bar

Speed: ≤ 15 m/s

Temperature: Up to 205°C

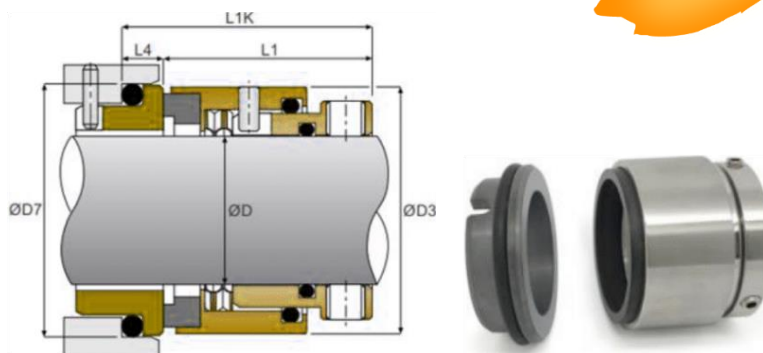

Metric		ØD3	L1	L1K	D-S16	
Code	Shaft ØD				ØD7	L4
0180	18	32	30.5	37.5	33	7
0200	20	34	30.5	37.5	35	7
0220	22	36	30.5	37.5	37	7
0240	24	38	33	40	39	7
0250	25	39	33	40	40	7
0280	28	42	35.5	42.5	43	7
0300	30	44	35.5	42.5	45	7
0320	32	47	35.5	42.5	48	7
0330	33	47	35.5	42.5	48	7
0350	35	49	35.5	42.5	50	7
0380	38	54	37	45	56	8
0400	40	56	37	45	58	8
0430	43	59	37	45	61	8
0450	45	61	37	45	63	8
0480	48	64	37	45	66	8
0500	50	66	38	47.5	70	9.5
0530	53	69	38	47.5	73	9.5
0550	55	71	38	47.5	75	9.5
0580	58	78	42	52.5	78	10.5
0600	60	80	42	52.5	80	10.5
0630	63	83	42	52.5	83	10.5
0650	65	85	42	52.5	85	10.5
0680	68	88	41.5	41.5	90	11
0700	70	90	48.5	60	92	11.5
0750	75	99	48.5	60	97	11.5
0800	80	104	48.5	60	105	11.5
0850	85	109	48.5	60	110	11.5
0900	90	114	52	65	115	13
0950	95	119	52	65	120	13
1000	100	124	52	65	125	13