

D-HJ92 / D-S46

DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary:

D-S46: - SiC / SSiC / TC

Rotary: - SiC / SSiC / TC


Elastomer: - NBR / EPDM / Viton / FFKM

Working Conditions

Pressure: ≤ 25 bar

Speed: ≤ 15 m/s

Temperature: Up to 205°C

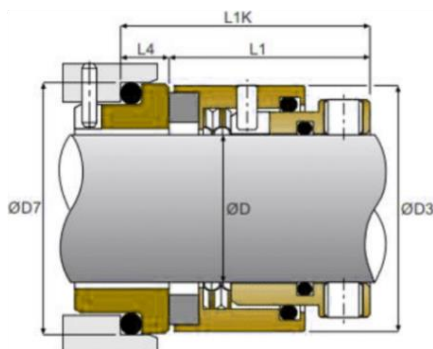

Metric		ØD3	L1	L1K	D-S46	
Code	Shaft ØD				ØD7	L4
0180	18	32	28.5	37.5	33	9
0200	20	34	28.5	37.5	35	9
0220	22	36	28.5	37.5	37	9
0240	24	38	31	40	39	9
0250	25	39	31	40	40	9
0280	28	42	33	42.5	43	9.5
0300	30	44	33	42.5	45	9.5
0320	32	47	33	42.5	48	9.5
0330	33	47	33	42.5	48	9.5
0350	35	49	33	42.5	50	9.5
0380	38	54	34.5	45	56	10.5
0400	40	56	34.5	45	58	10.5
0430	43	59	34.5	45	61	10.5
0450	45	61	34.5	45	63	10.5
0480	48	64	34.5	45	66	10.5
0500	50	66	35.5	47.5	70	12
0530	53	69	35.5	47.5	73	12
0550	55	71	35.5	47.5	75	12
0580	58	78	39.5	52.5	78	13
0600	60	80	39.5	52.5	80	13
0630	63	83	39.5	52.5	83	13
0650	65	85	39.5	52.5	85	13
0680	68	88	39	39	90	13.5
0700	70	90	46	60	92	14
0750	75	99	46	60	97	14
0800	80	104	46	60	105	14
0850	85	109	46	60	110	14
0900	90	114	49.5	65	115	15.5
0950	95	119	49.5	65	120	15.5
1000	100	124	49.5	65	125	15.5