

D-IT / D-ITD

Tapered Spring Seal


DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - Car / SiC / TC
Rotary: - Car / SiC / TC
Elastomer: - NBR / EPDM / Viton

Working Conditions

Pressure: ≤ 10 bar
Speed: ≤ 15 m/s
Temperature: Up to 205°C

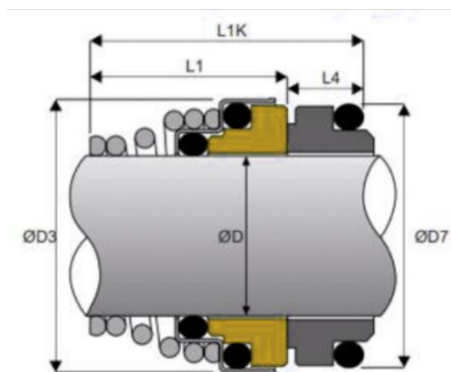

Shaft ØD	ØD3	L1	D-IT			D-ITD		
			L1K	L4	ØD7	L1K	L4	ØD7
10	19.5	15	20.5	5.5	18.1	22	7	21
11	22	18	23.5	5.5	20.6	-	-	-
12	23	18	23.5	5.5	20.6	25	7	23
13	25	22	28	6	23.1	-	-	-
14	25	22	28	6	23.1	29	7	25
15	28.7	22	29	7	26.9	-	-	-
16	28.7	23	30	7	26.9	30	7	27
17	28.7	23	30	7	26.9	-	-	-
18	32.7	24	32	8	30.9	34	10	33
19	32.7	25	33	8	30.9	-	-	-
20	32.7	25	33	8	30.9	35	10	35
21	37.5	25	33	8	35.4	-	-	-
22	37.5	25	33	8	35.4	35	10	37
23	37.5	27	35	8	35.4	-	-	-
24	37.5	27	35	8	35.4	37	10	39
25	40	27	35.5	8.5	38.2	37	10	40
28	45.5	29	38	9	43.3	39	10	43
29	45.5	30	39	9	43.3	-	-	-
30	45.5	30	39	9	43.3	40	10	45
32	45.5	30	39	9	43.3	40	10	48
33	48	39	50.5	11.5	53.5	49	10	48
35	50	39	50.5	11.5	53.5	49	10	50
38	56	39	50.5	11.5	60.5	52	13	56
40	58	39	50.5	11.5	60.5	52	13	58