

D-M3 / D-M3N

Tapered Spring Seal


DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - SS
Rotary: - Car
Elastomer: - NBR / EPDM / Viton

Working Conditions

Pressure: ≤ 10 bar
Speed: ≤ 10 m/s
Temperature: Up to 180°C

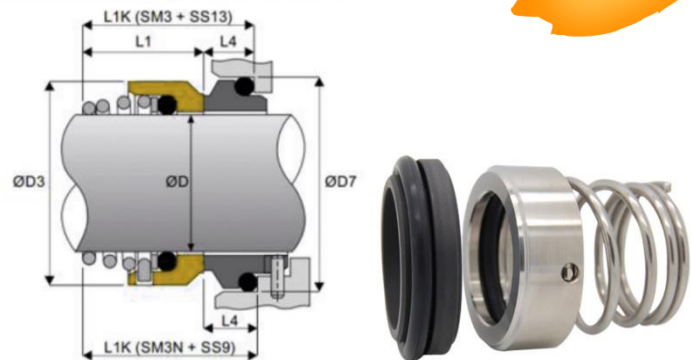

Shaft ØD	ØD3	L1	D-M3 – D-S13			D-M3N – D-S9		
			L1K	L4	ØD7	L1K	L4	ØD7
10	19	16	22.6	22.6	19.2	25.5	10	21
12	21	16	23.6	23.6	21.6	26	10	23
14	23	16.5	24.1	24.1	24.6	26.5	10	25
16	26	18	27	27	28	28	10	27
18	29	19.5	29.5	29.5	30	31	11.5	33
20	31	22	31.5	31.5	35	33.5	11.5	35
22	33	21.5	31	31	35	33	11.5	37
24	35	23.5	33	33	38	35	11.5	39
25	36	26.5	36	36	38	38	11.5	40
28	40	26.5	37.5	37.5	42	38	11.5	43
30	43	26.5	37.5	37.5	45	38	11.5	45
32	46	28.5	39.5	39.5	48	40	11.5	48
33	47	28.5	40	40	50	40	11.5	48
35	49	28.5	40	40	52	40	11.5	50
38	53	33.5	45	45	55	47.5	14	56
40	56	36	47.5	47.5	58	50	14	58
43	59	38.5	52.8	52.8	62	52.5	14	61
45	61	39.5	53.8	53.8	64	53.5	14	63
48	64	46	60.3	60.3	68.4	60	14	66
50	66	45	59.3	59.3	69.3	60	15	70
53	69	47	61.3	61.3	72.3	62	15	73
55	71	49	64.3	64.3	75.4	64	15	75
58	76	55	70.3	70.3	78.4	70	15	78
60	78	55	70.3	70.3	80.4	70	15	80
63	83	55	70.3	70.3	83.4	70	15	83
65	84	55	70.3	70.3	85.4	70	15	85
68	88	55	71	71	91.5	73	18	90
70	90	57	72.3	72.3	92	75	18	92
75	98	62	77.3	77.3	99	80	18	97
80	100	61.8	78.1	78.1	104	80	18.2	105