

D-M32 / D-M32N

Tapered Spring Seal


DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - Car / SiC / TC
Rotary: - Car / SiC / SiC / TC / SS
Elastomer: - NBR / EPDM / Viton

Working Conditions

Pressure: ≤ 10 bar
Speed: ≤ 10 m/s
Temperature: Up to 180°C

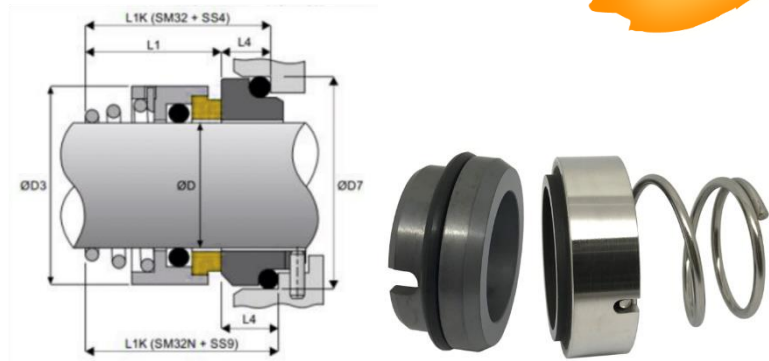

Metric		ØD3	L1	D-M32 - D-S4			D-M32N - D-S9		
Code	Shaft ØD			L1K	ØD7	L4	L1K	ØD7	L4
100	10	20	16.9	23.5	19.2	6.6	26.9	21	10
120	12	22	17.4	23	21.6	5.6	27.4	23	10
140	14	24	17.4	23	24.6	5.6	27.4	25	10
150	15	25	17.4	24	24.6	6.6	27.4	27	10
160	16	26	19.5	27	28	7.5	31	33	11.5
180	18	31	20.5	28.5	30	8	32	35	11.5
200	20	34	22	29.5	35	7.5	33.5	37	11.5
220	22	36	23.5	31	35	7.5	35	39	11.5
240	24	38	25	32.5	38	7.5	36.5	40	11.5
250	25	39	26.5	34	38	7.5	38	43	11.5
260	26	40	26.5	34.5	40	8	38	45	11.5
280	28	42	26.5	35.5	42	9	38	48	11.5
300	30	44	25	35.5	45	10.5	36.5	50	11.5
320	32	46	28.5	39	48	10.5	42.5	56	14
350	35	49	28.5	39.5	52	11	42.5	58	14
380	38	54	32.2	42.5	55	10.3	46.2	63	14
400	40	56	34.7	45.5	58	10.8	48.7	66	14
420	42	58	37.3	49.3	62	12	52.3	70	15
450	45	61	39.2	50.8	64	11.6	54.2	75	15
480	48	64	44.7	56.3	68.4	11.6	59.7	78	15
500	50	66	45.7	57.3	69.3	11.6	60.7	80	15
550	55	71	49	62.3	75.4	13.3	64	85	15
580	58	78	52	65.3	78.4	13.3	70	90	18
600	60	79	53	66.3	80.4	13.3	71	92	18
650	65	85	54.3	67.3	85.4	13	72.3	97	18
680	68	88	55.3	69	91.5	13.7	73.5	105	18.2
700	70	90	56.3	69.3	92	13	-	-	-
750	75	98	56.3	70.3	99	14	-	-	-
800	80	103	59.3	74.3	104	15	-	-	-