

D-M37G / D-M37GN

Tapered Spring Seal


DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - SiC / SSiC / TC
Rotary: - SiC / SSiC / TC
Elastomer: - NBR / EPDM / Viton

Working Conditions

Pressure: ≤ 10 bar
Speed: ≤ 10 m/s
Temperature: Up to 180°C

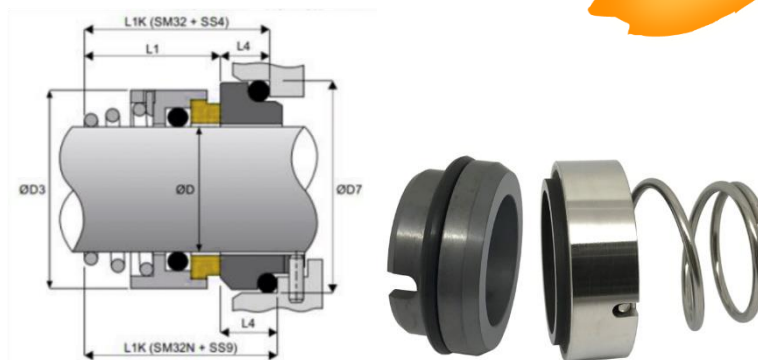

Shaft ØD	ØD3	L1	D-M37G – D-S4			D-M37GN – D-S9		
			L1K	ØD7	L4	L1K	ØD7	L4
14	24	16.5	22.1	24.6	5.6	26.5	25	10
16	26	16.5	24	28	7.5	26.5	27	10
18	31	18	26	30	8	29.5	33	11.5
20	34	19	26.5	35	7.5	30.5	35	11.5
22	36	20.5	28	35	7.5	32	37	11.5
24	38	22	29.5	38	7.5	33.5	39	11.5
25	39	23.5	31	38	7.5	35	40	11.5
28	42	24.5	33.5	42	9	36	43	11.5
30	44	24.5	35	45	10.5	36	45	11.5
32	46	28	38.5	48	10.5	39.5	48	11.5
35	49	28	39	52	11	39.5	50	11.5
38	54	31	41.3	55	10.3	45	56	14
40	56	34	44.8	58	10.8	48	58	14
45	61	36.5	48.1	64	11.6	50.5	63	14
48	64	42	53.6	68.4	11.6	56	66	14
50	66	43	54.6	69.3	11.6	58	70	15
55	71	47	60.3	75.4	13.3	62	75	15
58	78	50	63.3	78.4	13.3	65	78	15
60	79	51	64.3	80.4	13.3	66	80	15
65	85	52	65	85.4	13	67	85	15
68	88	52.7	66.4	91.5	13.7	70.7	90	18
70	90	54	67	92	13	72	92	18
75	98	54	68	99	14	72	97	18
80	103	58	73	104	15	76.2	105	18.2