

D-M7N


DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - Car / SiC / SiC / TC
Rotary: - SiC / SiC / TC / SS
Elastomer: - NBR / EPDM / Viton

Working Conditions

Pressure: ≤ 25 bar
Speed: ≤ 20 m/s
Temperature: Up to 205°C

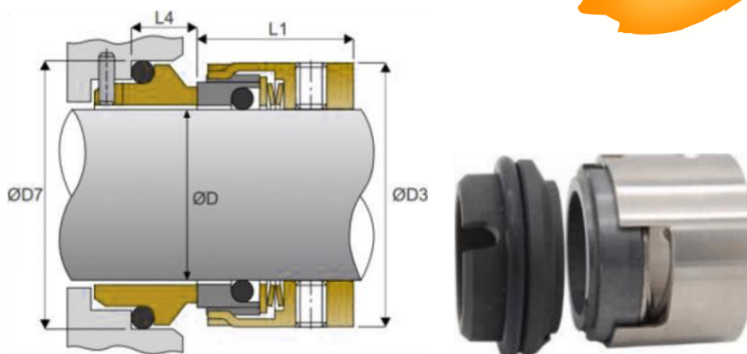

Metric		L1	ØD3	D-S9 – Stationary	
Code	Shaft ØD			L4	ØD7
0140	14	25	25	10	25
0160	16	25	27	10	27
0180	18	26	33	11.5	33
0200	20	26	35	11.5	35
0220	22	26	37	11.5	37
0240	24	28.5	39	11.5	39
0250	25	28.5	40	11.5	40
0280	28	31	43	11.5	43
0300	30	31	45	11.5	45
0320	32	31	47	11.5	48
0330	33	31	48	11.5	48
0350	35	31	50	11.5	50
0380	38	31	55	14	56
0400	40	31	57	14	58
0430	43	31	60	14	61
0450	45	31	62	14	63
0480	48	31	65	14	66
0500	50	37.5	67	15	70
0530	53	37.5	70	15	73
0550	55	37.5	72	15	75
0580	58	37.5	79	15	78
0600	60	37.5	81	15	80
0630	63	37.5	84	15	83
0650	65	37.5	86	15	85
0680	68	34.5	89	18	90
0700	70	42	91	18	92
0750	75	42	99	18	97
0800	80	41.8	104	18.2	105