


D-S55

Stationary Seat

DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - Car / SiC / SiC / TC / ChrStl
Elastomer: - NBR / EPDM / Viton

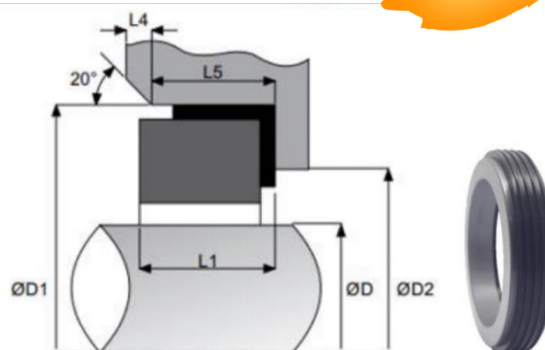

Shaft ØD		ØD1	ØD2	L1	L4	L5
mm	inch					
10	9.5	22.23	15.88	7.9	1.27	6.35
12	12.7	25.4	19.05	7.9	1.27	6.35
14	15.8	31.75	23.8	10.3	1.27	8.74
16	15.8	31.75	23.8	10.3	1.27	8.74
17	19.1	34.93	26.97	10.3	1.27	8.74
18	19.1	34.93	26.97	10.3	1.27	8.74
19	19.1	34.93	26.97	10.3	1.27	8.74
20	20.6	-	-	-	1.27	8.74
22	22.2	38.1	30.15	10.3	1.27	8.74
24	25.4	41.28	33.32	11.1	1.27	9.53
25	25.4	41.28	33.32	11.1	1.27	9.53
27	28.5	44.45	36.5	11.1	1.27	9.53
28	28.5	44.45	36.5	11.1	1.27	9.53
29	28.5	44.45	36.5	11.1	1.27	9.53
30	31.7	47.63	39.7	11.1	1.27	9.53
32	31.7	47.63	39.7	11.1	1.27	9.53
34	34.9	50.8	42.85	11.1	1.27	9.53
35	34.9	50.8	42.85	11.1	1.27	9.53
38	38.1	53.98	46.05	11.1	1.27	9.53
40	41.2	60.33	50.8	12.7	1.27	11.1
42	44.4	63.5	53.98	12.7	1.27	11.1
43	44.4	63.5	53.98	12.7	1.27	11.1
45	44.4	63.5	53.98	12.7	1.27	11.1
48	47.6	66.68	57.15	12.7	1.27	11.1
50	50.8	69.85	60.33	12.7	1.27	11.1
53	53.9	76.2	60.33	14.2	1.27	12.7
54	53.9	76.2	60.33	14.2	1.27	12.7
55	57.1	79.38	61.9	14.2	1.27	12.7
60	60.3	82.55	65.1	14.2	1.27	12.7
63	63.5	85.73	68.25	14.2	1.27	12.7
65	66.6	85.73	71.42	15.9	2.54	14.27
70	69.8	88.9	74.6	15.9	2.54	14.27
73	73	92.25	77.77	15.9	2.54	14.27
75	76.2	98.43	80.95	15.9	2.54	14.27
-	79.3	101.6	84.12	19.8	2.54	16.66
80	82.5	104.78	87.3	19.8	2.54	16.66
85	85.7	107.95	90.47	19.8	2.54	16.66
90	88.9	111.13	93.65	19.8	2.54	16.66
-	92	114.3	96.82	19.8	2.54	16.66
95	95.2	117.48	100	19.8	2.54	16.66
-	98.4	120.65	103.17	19.8	2.54	16.66
100	101.6	123.83	106.35	19.8	2.54	16.66