


D-SWE / D-SWU

Stationary Seat

DAIKOTE
INNOVATIVE SOLUTIONS

Materials

Stationary: - Car / SiC / SiC / TC / ChrStl
Elastomer: - NBR / EPDM / Viton

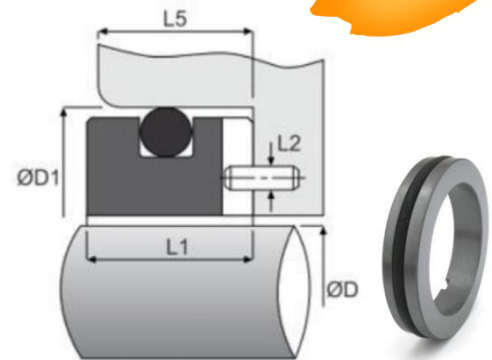

Shaft ØD		ØD1		L1		L2	L5
mm	inch	D-SWE	D-SWU	D-SWE	D-SWU		
10	95	24.6	-	8.7	-	3	7.1
12	127	27.8	25.4	8.7	7.9	3	7.1
14	158	30.95	31.75	10.3	10.3	3	8.7
16	158	30.95	31.75	10.3	10.3	3	8.7
17	191	34.15	34.93	10.3	10.3	3	8.7
18	191	34.15	34.93	10.3	10.3	3	8.7
19	191	34.15	34.93	10.3	10.3	3	8.7
20	206	35.7	-	10.3	-	3	8.7
22	222	37.3	38.1	10.3	10.3	3	8.7
24	254	40.5	41.28	10.3	11.1	3	8.7
25	254	40.5	41.28	10.3	11.1	3	8.7
27	285	47.65	44.45	11.9	11.1	3	10.3
28	285	47.65	44.45	11.9	11.1	3	10.3
29	285	47.65	44.45	11.9	11.1	3	10.3
30	317	50.8	47.63	11.9	11.1	3	10.3
32	317	50.8	47.63	11.9	11.1	3	10.3
34	349	54	50.8	11.9	11.1	3	10.3
35	349	54	50.8	11.9	11.1	3	10.3
38	381	57.15	53.98	11.9	11.1	3	10.3
40	412	60.35	60.33	11.9	12.7	3	10.3
42	444	63.5	63.5	11.9	12.7	3	10.3
43	444	63.5	63.5	11.9	12.7	3	10.3
45	444	63.5	63.5	11.9	12.7	3	10.3
48	476	66.7	66.68	11.9	12.7	3	10.3
50	508	69.85	69.85	13.5	12.7	3	11.9
53	539	73.05	76.2	13.5	14.2	3	11.9
54	539	73.05	76.2	13.5	14.2	3	11.9
55	571	76.2	79.38	13.5	14.2	3	11.9
60	603	79.4	82.55	13.5	14.2	3	11.9
63	635	82.55	85.73	13.5	14.2	3	11.9
65	666	92.1	85.73	15.9	15.9	4	14.3
70	698	95.25	88.9	15.9	15.9	4	14.3
73	730	98.45	95.25	15.9	15.9	4	14.3
75	762	101.6	98.43	15.9	15.9	4	14.3
-	793	111.15	101.6	19.9	19.8	5	18.3
80	825	114.3	104.78	19.9	19.8	5	18.3
85	857	117.5	107.95	19.9	19.8	5	18.3
90	889	120.65	111.13	19.9	19.8	5	18.3
-	920	123.85	114.3	19.9	19.8	5	18.3
95	952	127	117.48	19.9	19.8	5	18.3
-	984	130.2	120.65	19.9	19.8	5	18.3
100	1016	133.35	123.83	19.9	19.8	5	18.3